### (19) World Intellectual Property Organization

International Bureau



## 

### (43) International Publication Date 17 March 2005 (17.03.2005)

**PCT** 

# (10) International Publication Number WO 2005/023667 A1

(51) International Patent Classification<sup>7</sup>: B65D 51/28, 81/32, 25/08

(21) International Application Number:

PCT/AU2004/001064

(22) International Filing Date: 9 August 2004 (09.08.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2003904913

9 September 2003 (09.09.2003) A

(71) Applicant and

(72) Inventor: CLARKSON, Aron Joseph [NZ/AU]; P.O.Box 539, South Melbourne, Victoria 3205 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declarations under Rule 4.17:


- as to the identity of the inventor (Rule 4.17(i)) for all designations
- as to applicant's entitlement to apply for and be granted a patem (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

### Published:

with international search report

[Continued on next page]

(54) Title: DISPENSING CLOSURE

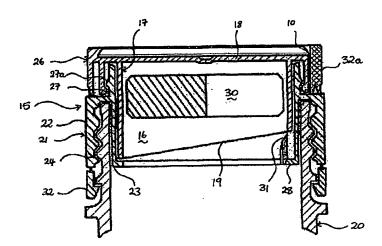

(57) Abstract: A dispensing closure (15) for a container (20), such as a beverage container, is provided so as to selectively dispense a product (30) carried by the closure (15) into the container (20). The container has a neck portion with which the closure is engaged to close or seal the container (20). The closure (15) has a body (21) having an outer wall portion (22) to engage an outer surface of the container neck to releasably secure the closure to the container. The closure (15) is provided with a compartment (16) to contain the product (30) to be dispensed. The compartment (16) is formed by a cylindrical side wall (17), a top wall (18) and a frangible bottom wall (19). A cutting blade (31) is moveable relative to the side wall (17) and the bottom wall (19) to break open the frangible bottom wall (19) to selectively dispense the contents (30) into the container (20). The closure (15) has means restricting inadvertent relative movement of the cutting blade (31).



023667 A1 |||||||||



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.